

TDG Audio's DA-1260 is a powerful 6-zone, 12-channel amplifier is a perfect way to expand any audio system to more areas of the home, office, restaurant, or retail store to provide power to speakers in any room or outdoor area. This slim 2U, rack-mountable multi-channel amplifier is powered by a toroidal transformer providing high efficiency and dampens acoustic noise. TDG Audio's DA Series of multi-channel amplifiers are only available through trained installation professionals and offer both exceptional audio quality and intuitive system operation.

We back our confidence in the reliability and performance with a unique **3-year warranty**.

## FEATURES


- 12 x 60 W Per Channel Full Digital Amp
- Toroidal Transformer Digital Amplifier Design
- 2U Rack Height
- Bridgeable Adjoining Channels
- Stereo Summing to Mono
- Auto On/Off w/ 3-24V AC/DC Trigger Input for Remote Power On
- 12V Trigger Output to Power On Other Devices with Voltage Trigger
- DigiPro™ Class D Amplifier Design for Maximum Sound Quality and Cooling
- AUX Inputs with Control Trigger
- Internal Bus-Pass for Multiple Amp Use
- Independent Level Controls for Each Channel
- Includes Rack Ears
- Manufactured by TDG Audio
- **LIMITED 3-YEAR WARRANTY**



## SPECIFICATIONS

- Rated Power Output: 60 Watts Per Channel at 4Ω / 50 Watts Per Channel at 8Ω
- Bridged Power Output: 120 Watts at 8Ω
- Input Impedance: >22K Ω
- S/N Ratio: (A-WTD) 102dB
- Frequency Response: ± 0.7dB, 20Hz to 20kHz, 8Ω - ± 1.5dB, 20Hz to 20kHz, 4Ω
- Input Sensitivity: 900mV for 8 Ω Rated Output
- Damping Factor: >60
- Separation: 70dB at 1KHz
- Total Harmonic Distortion: <0.2% 20Hz to 20kHz
- Fuse Rating: 120V Version: T12A/250V
- Dimensions 3.5" H x 17.2" W x 16.125" D
- Weight 50.3 lbs

## FRONT PANEL

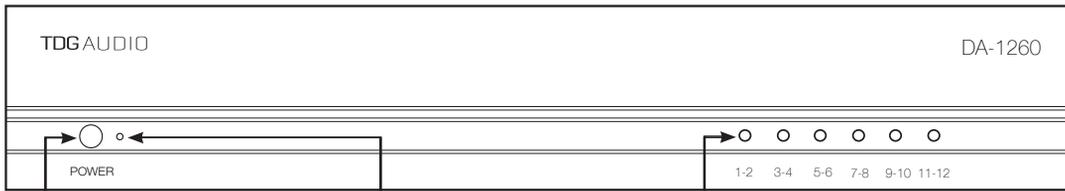

Main power switch.  
Turns on and off power to amplifier.

Main power LED indicates when

Protection LEDs indicate:

1. Speaker wire short; flashing red LED.
2. When voltage > 0.7V (DC voltage output to speaker terminal); constant red LED.
3. When current overload; constant red LED.

## BACK PANEL

Main bus input allows output from receivers, CD players, TVs, or any stereo audio source to be amplified across all channels for easy multi-room applications.


Bus outputs allow the bus inputs to be sent to other amplifiers or a daisy chain without the need for 'Y' cables or splitters.

Independent level controls for each channel.

Independent channel inputs allow different audio sources to connect to each channel.

Individual channel source selection.

3-Prong removable power plug. Fuse included.

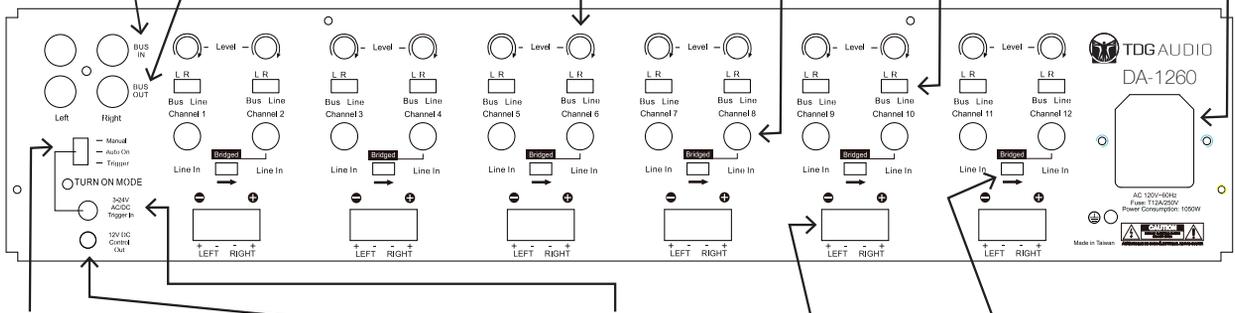

Slide switch to choose between different trigger methods to power up the amplifier.

12V output to turn on other devices when amplifier is powered up. Connect to projector screens, powered drapes, or other devices with voltage triggers.

3-24V AC/DC remote power on trigger input.

Speaker Level Output Connectors.

Bridgeable adjoining channels.

