


MAXHUB Commercial Display

Model: UW92NA

Elevate collaboration and productivity with the 92-inch Ultra-Wide 5K Display. Its panoramic viewing angle, large size, and stunning definition seamlessly integrate into any setting. Every minute of attention paid to this ultra-wide, high-definition display results in more expansive communication and a more profound impression on the viewer.

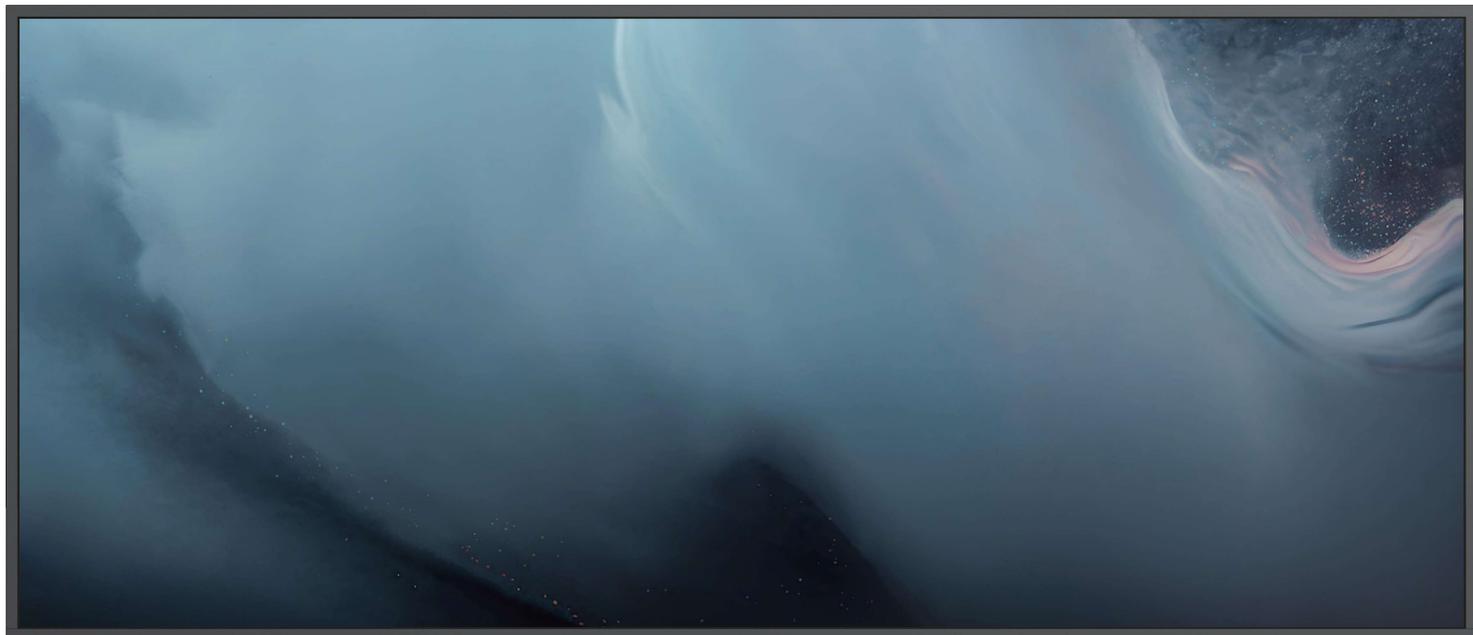

Professional 5K Display

5K Resolution, 500 nits brightness
Anti-Glare, 25% Haze



Wireless Screen Sharing

Share your screen through MAXHUB
Share app or wireless dongle



External Control

Display control through IP
or RS232 protocol



Device Management

Manage through cloud based
MAXHUB Pivot



Built-in Speakers

2x20W+20W speaker
2.1 sound channel



Upgrade Your Display

OPS slot availability to transform your
display into a windows-based display



24/7 Operation

Reliable display performance
with landscape and portrait modes



BYOM Anytime

Embrace drive-free efficiency enabled
by MAXHUB BYOM (Bring Your Own
Meeting) technology

Display	
Model	UW92NA
Screen Size (Inch)	92
Aspect Ratio	21:9
Panel	VA
Backlight	DLED
Brightness (Typ.)	500 nits
Brightness (Max.)	600 nits
Haze	25%
Resolution	5120 × 2160
Refresh Rate	60 Hz
Contrast Ratio	5000:1 (typ.) 1,000,000:1 (dynamic)
Viewing Angle (H × V)	178° / 178°
Color Gamut	72% NTSC
Display Orientation	Landscape / Portrait
Response Time	6.5 ms
Life Time (50%)	>50,000 hours
Operation Hours (Hours / Day)	24 / 7
Display Color	1.07B
Pixel Pitch	0.13945 (H) × 0.41835 (V) mm
Display Area	2141.952 (H) × 903.636 (V) mm

Built-in System	
Operating System	Android 13.0
CPU	A76 × 4 + A55 × 4
GPU	Mali-G610 MP4
RAM	8 GB
ROM	64 GB

Connectivity	
Input	
HDMI IN × 4	HDMI 2.0 × 3, up to 4K@60Hz, HDCP 2.3, CEC HDMI 2.1 × 1, up to 5K@60Hz, HDCP 2.3, CEC, ARC (HDMI 1)
USB 2.0 × 1	For system upgrades
USB 3.0 × 4	2 × Onboard, 2 × Top
USB Type-C × 1	Up to PD 20V 5A Video, Audio, Touch, Charge, LAN Network Sharing
DP IN × 1	5K@60hz HDCP 1.4&2.3
AUDIO IN × 1	3.5mm Jack
RS232 × 1	Baud rate 9600
RJ45 IN × 1	10M / 100M / 1000Mbps
Output	
HDMI OUT × 1	Up to 4K@60Hz
TOUCH 2.0 × 3	USB2.0 Type B
AUDIO OUT × 1	3.5mm Jack
SPDIF × 1	PCM output format
RJ45 OUT × 1	10M / 100M / 1000Mbps
OPS Slot	Module slot × 1
Wi-Fi Slot	Module slot × 1
Wi-Fi	Wi-Fi 6 supported 802.11ac/b/g/n/a/ax, 2.4GHz/5GHz
Bluetooth	5.2

Audio	
Sound Channel	2.1
Speaker Power	2 × 20W + 20W

Feature	
System OS	MAXHUB Meeting OS
Screen Share	MAXHUB Share Support BYOM / Miracast / Airplay / Chromecast
Device Management	MAXHUB Pivot
Protocol Control	RS232 / IP control
Special Features	Screen rotation / Auto input change / Play via URL / Wake on LAN / HDMI CEC / Compatible with control systems (Crestron, Q-SYS, and Extron)

Accessory	
Power Cord	3m x 1
HDMI Cable	3m x 1
Remote Control	x 1
Wall Mount	WIB9080A
Wireless Adapter	SI07B

Physical Specification	
Bezel Width (L x R x T x B)	17.9 x 17.9 x 17.9 x 17.9 mm / 0.7 x 0.7 x 0.7 x 0.7 inch
Dimension (W x H x D)	2182 x 944 x 85 mm / 85.90 x 37.16 x 3.35 inch
Shipping Dimension (W x H x D)	2360 x 1072 x 225 mm / 92.91 x 42.20 x 8.86 inch
Thickness of machine and wall mount	110.2 mm / 4.34 inch (WIB9080A)
Wall-hanging Screw Spec	M8 x 25 mm
VESA	800 x 600 mm
Net Weight	43.40 Kg / 95.68 Pounds
Gross Weight	62.60 Kg / 138.01 Pounds

Environmental Conditions	
Operating Temperature	0°C~40°C
Storage Temperature	-20°C~60°C
Operating Humidity	10%~90%RH
Storage Humidity	10%~90%RH
Altitude	Below 5000 meters

Power	
AC Input	100~240V~50/60Hz, 8.0A
AC Output	100~240V~50/60HZ MAX 250W
Standby Power	≤ 0.5 W
Power Consumption (Energy Saving)	177 W
Power Consumption (Typ.)	320W
Power Consumption (Max.)	530 W

Certification	
Environment	Energy Star
IP Rating	IP5X

Warranty	
Display	3 years warranty

Optional Module		
 OPS (OPS72A)	 Mobile Stand (ST41B)	 Mobile Stand (ST32C)

Statement

Size and weight vary by configuration and manufacturing process, please refer to the actual product. The product images are for illustrative purposes only and may slightly differ in appearance, colour, size, etc. from the actual product. The description, illustrations, etc. in this document may subject to change in accordance with the latest product specification and performance. Should the above-mentioned change in the document become necessary, the document may be updated without written notice.

MAXHUB

Beyond Collaboration